
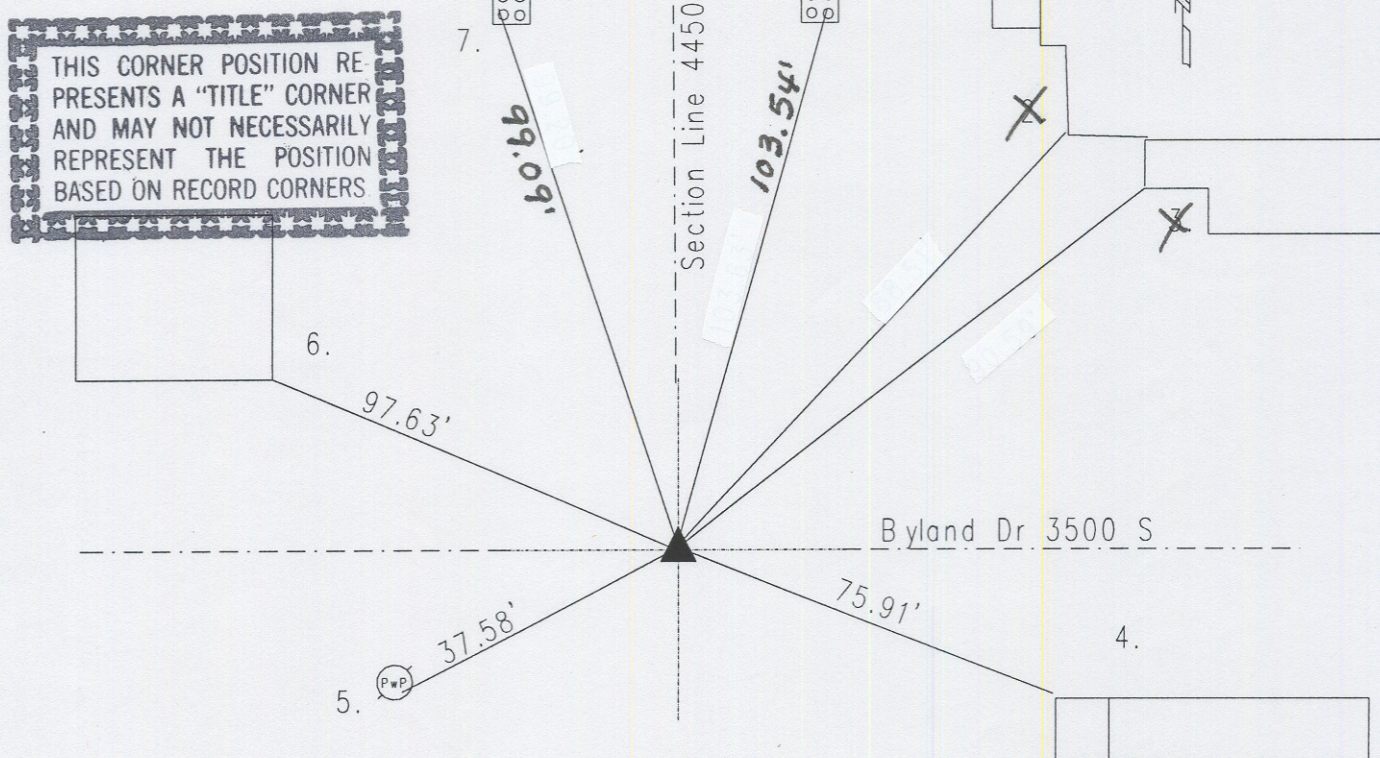


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 28 TOWNSHIP 15 RANGE 4  
DATE: -3-20-04- 11-17-06  
PARTY CHIEF: Whiteside Wilcoxon  
CREW: Mag nail over:  
TYPE OF MARKER: Broken Harrison  
METHOD OF ESTABLISHMENT: County: 8-1-96

IN. S.P.C. E ZONE, NAD 83  
NAME: 15042805  
N: 496102.6450(m)  
E: 63518.7867(m)

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS



Original post set per survey 8-1-1854 by Hosbrook called no stone; but witnesses: 10" beech S 48 1/2 W 28 links, 6" beech N 4 W 78 links Perry Township Legal Survey Book pg. 8. Burres 1-1950 called stone. Monroe 2-5-52 called steering wheel shaft. McLand 2-28-74 called PK nail. Wilcoxon 10-20-75 called road nail. Greene 8-11-88 called road nail. Harrison set. Re-tied 8-1-96 by Wilcoxon. Re-tied 3-20-01 by Whiteside.

15042805

| REF. | DISTANCE          | DESCRIPTION  |
|------|-------------------|--|
| 1.   | 103.54'           | SE bolt on sign base                                     |
| 2.   | <del>88.51'</del> | <del>SW corner of frame/aluminum house ADDRESS 269</del> |
| 3.   | <del>90.59'</del> | <del>SW corner of porch "</del>                          |
| 4.   | 75.91'            | NW corner porch frame house ADDRESS 303                  |
| 5.   | 37.58'            | PK nail SE PwP#25-672A 8"up                              |
| 6.   | 97.63'            | SE corner of brick ADDRESS 234                           |
| 7.   | 99.09'            | SW bolt on sign base                                     |
|      |                   |  |
|      |                   |  |
|      |                   |  |